




AS-Interface value-added automation set for pneumatic
quarter-turn actuators

Added Value package AS-i T5

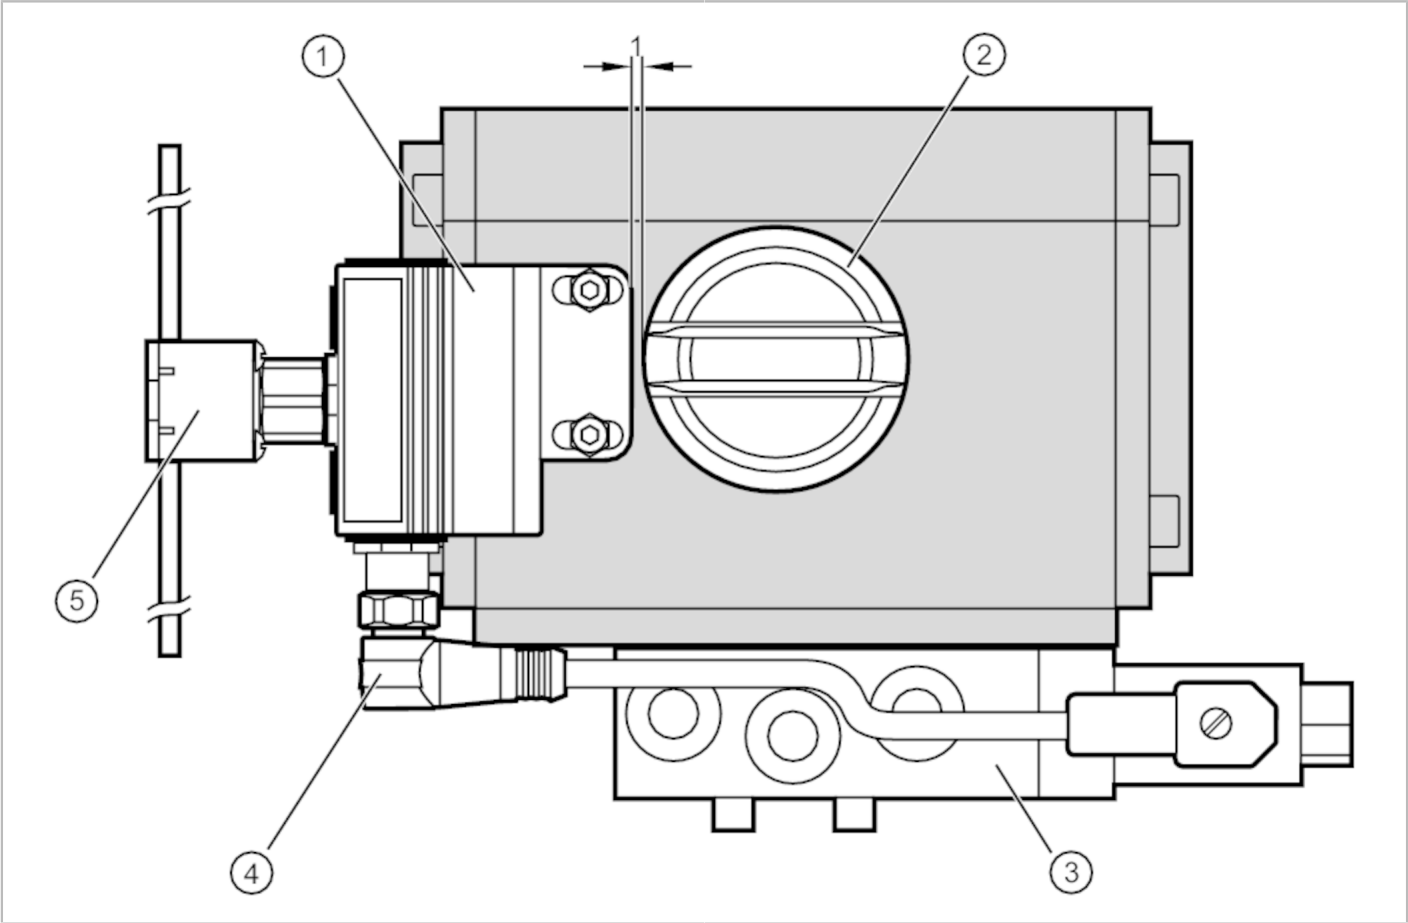

Product characteristics		
Output function		PNP
Sensing range	[mm]	4
Electrical data		
Max. current consumption from AS-i	[mA]	160
Operating voltage AUX DC	[V]	26.5...31.6; (cULus - Class 2 source required)
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 2; Number of digital outputs: 1
Inputs		
Number of digital inputs		2
Outputs		
Number of digital outputs		1
Output function		PNP
Monitoring range		
Sensing range	[mm]	4
AS-i classification		
AS-i version		2.1
AS-i profile		S-7.A.E
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	A.E

AC0017



AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

Mechanical data	
Weight [g]	867
Mounting	non-flush mountable
Hole spacing [mm]	80
Shaft height of actuator stem [mm]	20
Accessories	
Items supplied	Dual sensor for actuator feedback: 1, AC2316
	Target puck: 1, E12517
	Spacer: 1, E12526
	Single solenoid valve: 1, Bürkert 428623
	Silencer: 2, 780780N
	Connection cable: 1, E10844
	Flat cable insulation displacement connector: 1, E70471
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Electrical connection - Socket	
Outputs	
3	External voltage -
4	Switching output 1 +
Electrical connection - plug	
Connection	
Connection	
1	AS-i +
3	AS-i -