


E12510



Male cordsets

ASTGN040ZDS0002L04

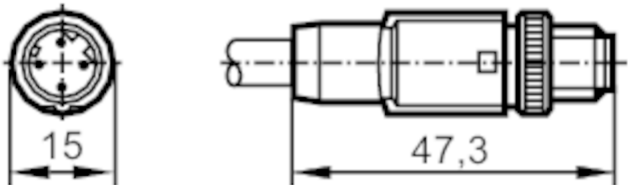

Application		
System		gold-plated contacts
Design		Ethernet cable, D-coded
Electrical data		
Operating voltage	[V]	< 250 AC/DC
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-40...70
Protection		IP 67
Mechanical data		
Weight	[g]	151.5
Dimensions	[mm]	15 x 15 x 47.3
Material		TPU (urethane)
Molded-body material		TPU (urethane)
Material nut		diecast zinc, nickel-plated
Remarks		
Pack quantity		1 pcs.

E12510



Male cordsets

ASTGN040ZDS0002L04

Electrical connection


Cable: 2 m, PVC, green, Ø 6.5 mm; 4 x 0.34 mm²

Electrical connection - plug

Connector: 1 x M12, straight; coding: D; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shield connected



Connection

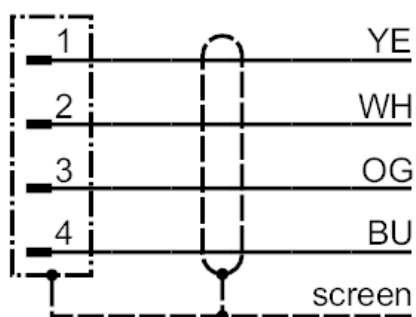

BU =	Core colors :
OG =	blue
WH =	orange
YE =	white
	yellow