




Fiber optic diffuse reflection sensor

FT-00-A-A-M6/1,5M

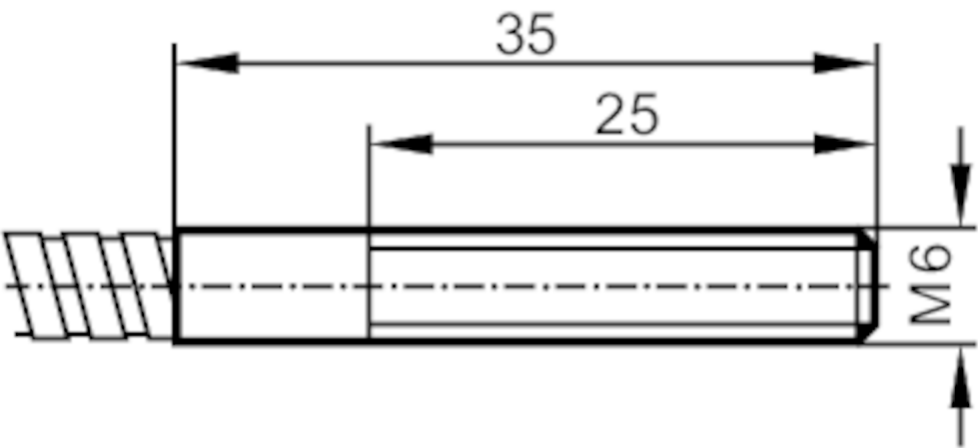

Application		
Function principle		Diffuse reflection sensor
Application		High temperature resistance; Robust design for use in harsh industrial environments
Monitoring range		
Range with fiber optic amplifier type		OCF; OKF; OUF
OCF (High Power)		
Range fiber optics	[mm]	270
OKF		
Range fiber optics	[mm]	36
OUF		
Range fiber optics	[mm]	36
Operating conditions		
Ambient temperature	[°C]	-40...290
Mechanical data		
Weight	[g]	72.5
Version of sensing head		straight
Sensing head thread		M6
Sensing head length	[mm]	35
Total length	[mm]	1500

E20086



Fiber optic diffuse reflection sensor

FT-00-A-A-M6/1,5M

Min. bending radius	[mm]	20; (for fixed installation)
Fiber arrangement		
Material		Adapter: ABS
Fiber material		glass
Fiber head material		aluminum
Fiber sheath material		aluminum
Accessories		
Items supplied		Hexagon nuts: 2 x M6, stainless steel
		tooth lock washers: 2
		Knurled nut: 1 x M11
Remarks		
Pack quantity		1 pcs.