
# EC0453

## Prewired jumper with contact housing





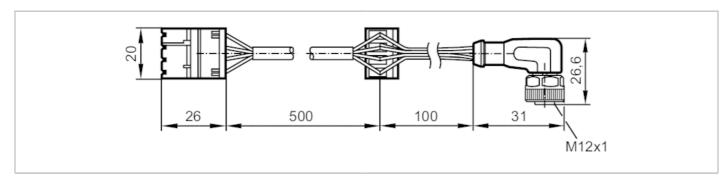

Application			
Design		wired, for BasicController and BasicDisplay, 2 x CR04xx, 1 x CR045x	
Application		voltage supply; CAN bus	
Operating conditions			
Ambient temperature	[°C]	-4085	
Mechanical data			
Weight	[g]	62.2	
Remarks			
Remarks		CAN bus terminating resistor (120 ohms) is integrated in the standard timer contact housing	
		use only sensible in conjunction with cover EC0402	
Pack quantity		1 pcs.	

## EC0453

### Prewired jumper with contact housing


R360/Cable/DisplayModules A



### Electrical connection

Cable: 0.5 m, PVC, black; 4 x 0.5 mm<sup>2</sup> / AWG 20

#### Connection

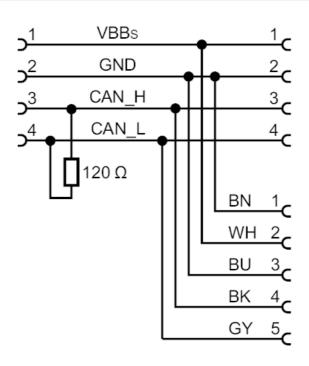

#### Core colors:

BK =	black
BN =	brown
BU =	blue
GY =	grey
WH =	white