


KT5009



Capacitive touch sensor

KTRDHMKGRBPKG/AM/2M

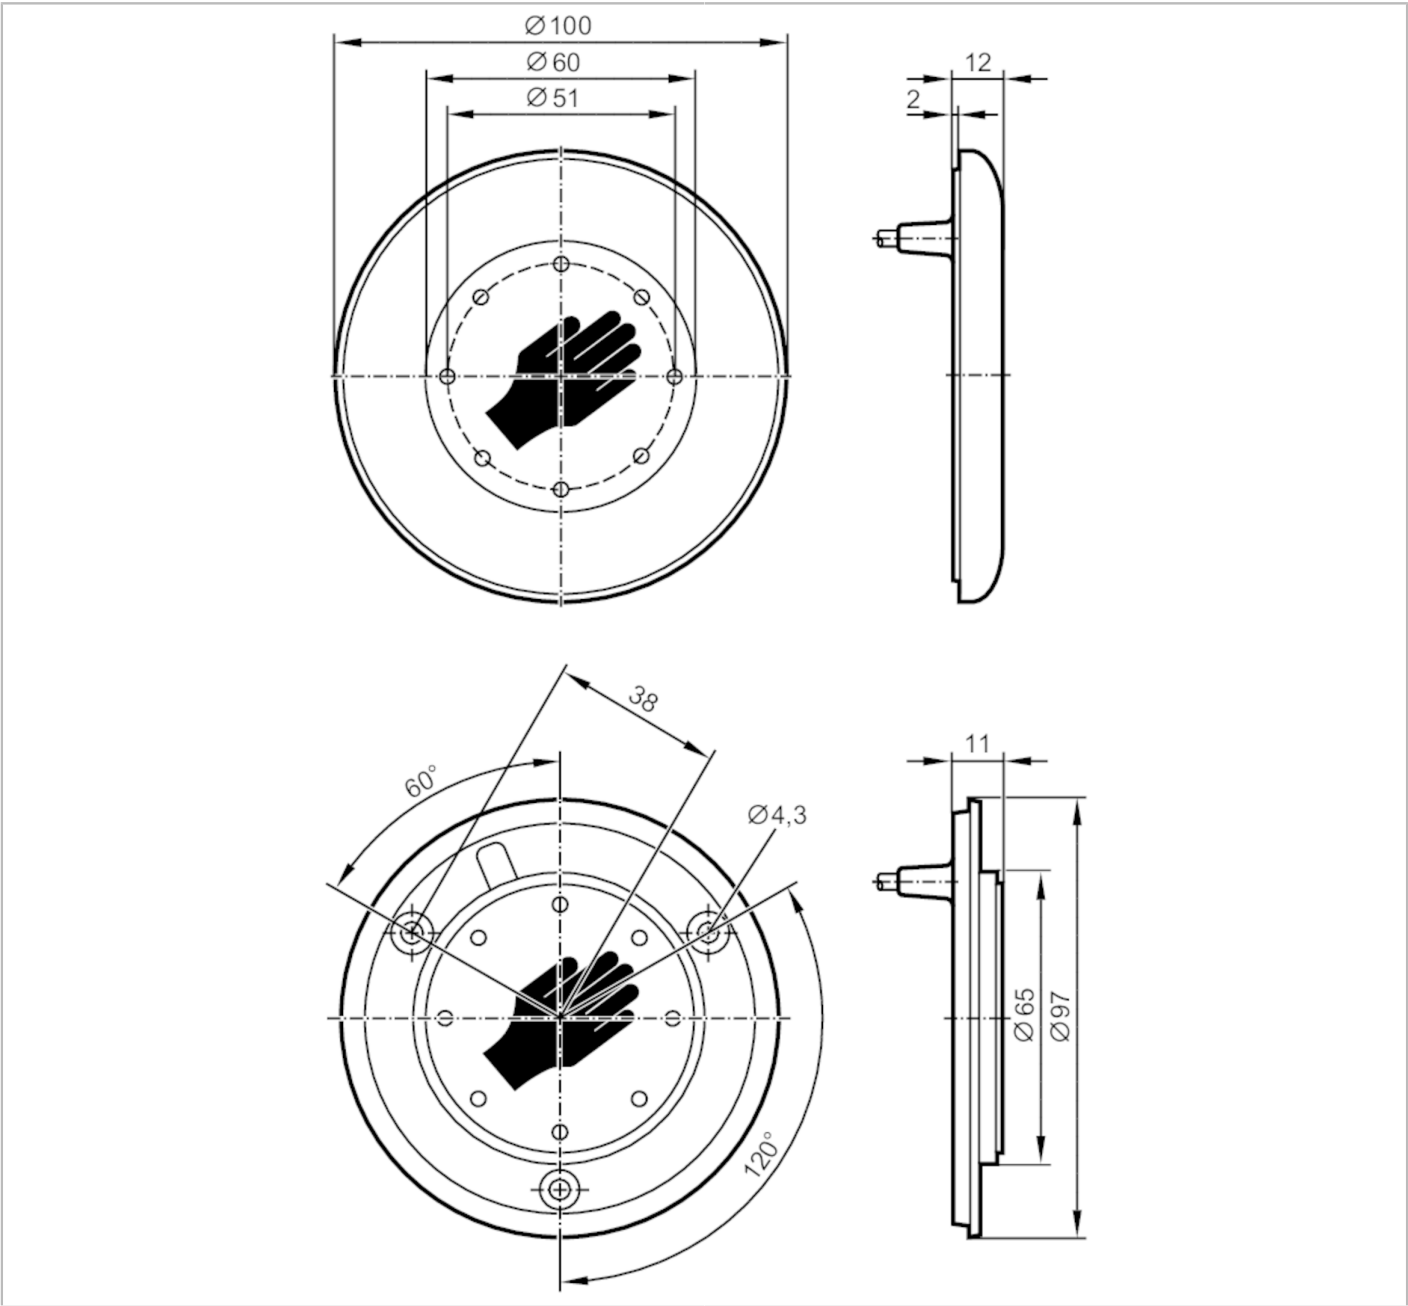

Product characteristics		
Electrical design		PNP
Output function		normally open
Dimensions	[mm]	Ø 100 / L = 11
Application		
Principle of operation		dynamic
Electrical data		
Operating voltage	[V]	12...30 DC
Current consumption	[mA]	30
Protection class		III

KT5009



Capacitive touch sensor

KTRDHMKGRBPKG/AM/2M

Reverse polarity protection		yes
Max. power-on delay time	[ms]	500
Outputs		
Electrical design		PNP
Output function		normally open
Permanent current rating of switching output DC	[mA]	200
Short-circuit protection		yes
Overload protection		yes
Length of output signal	[ms]	300
Reaction times		
Response time	[ms]	35
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 67; IP 69K; (on the front)
Tests / approvals		
MTTF	[years]	419
Mechanical data		
Weight	[g]	160.5
Dimensions	[mm]	Ø 100 / L = 11
Material		actuating surface: PA Grilamid TR 90UV transparent; housing: PC/ABS black; Colored surround: PC/ABS green
Displays / operating elements		
Display	Switching status	8 x LED, red
	Function	8 x LED, green can be triggered
Accessories		
Accessories (optional)		surround in different colors
Remarks		
Pack quantity		1 pcs.

KT5009




Capacitive touch sensor

KTRDHMKGRBPKG/AM/2M

Electrical connection

Cable: 2 m, PUR

Connection

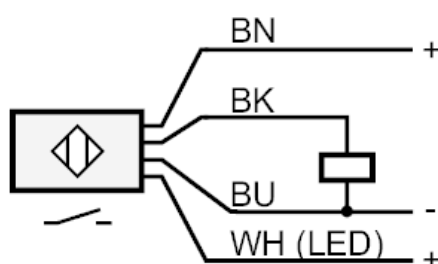

BK =	Core colors :	black
BN =		brown
BU =		blue
WH =		white